


LED Module Power Supply

PTDC10 series

Features

- Independent direct current power supply
- High Efficiency
- Steady Output Voltage
- Wide Input Voltage range

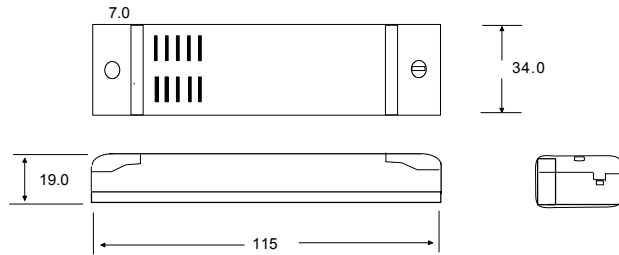

Notes: All dimension are in millimeter tolerance is $\pm 0.25\text{mm}$

Parameter	SYMBOL	10v	12v	24v
Nominal Input Voltage	V ac	95~240	95~240	95~240
Frequency	Hz	50~60	50~60	50~60
DC Output Voltage	Vdc	10	12	24
Output Power	W	8	9	10
Ambient Temperature	Ta°C	40	40	40
Max Temperature on Tc dot	Tc°C	75	80	80
Thermal Protection		yes	yes	yes
Overload Protection		yes	yes	yes
Overcurrent Protection		yes	yes	yes
Short Circuit Protection		yes	yes	yes
Input Cables section	mm	0.5~2.5	0.5~2.5	0.5~2.5
Ouput Cables section	mm	2x0.75	2x0.75	2x0.75
Weight	g	60	60	60
Dimensions	mm			
Certifications		CSv	CSv	CSv

Other voltage options are available on request
Specifications may be subject to change without notice