

High Power RGB Module Is In Chains


Designed for channel letter illumination and sign backlighting the PA3314-LGXRGB comprises of a single high power integrated RGB emitter mounted on metal core PCB.

Measuring 33x14mm modules may be easily wired together in a series chain arrangement using flexible miniature plug-in links.

The emitter may be driven up to 350mA and produces a typical output for Red 30, Green 50 and Blue 15 lumens @350mA with a wide 120° angle of emission.

Modules should be used in conjunction with secondary heat sinks for efficient operation and reliable thermal management.

Chains should be configured and driven using 350mA max constant current drivers and controllers for full colour schemes.

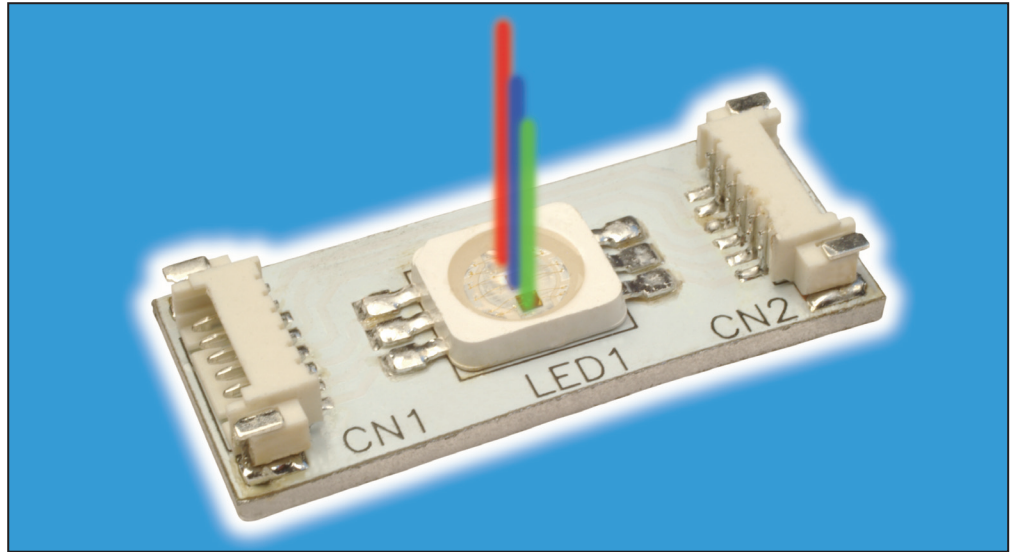

B13 Derwent Court William Way Moss Industrial Estate Leigh Lancashire WN7 3PT

T +44 (0) 1942 671122 **F** +44 (0) 1942 671133 **W** www.plusopto.co.uk **E** sales@plusopto.co.uk