

### Features

- Constant voltage output
- Built-in active PFC function
- Supports triac dimming; dimming depth  $\leq 0.1\%$
- High efficiency (typical value  $\geq 88\%$ )
- Flicker free
- All-round protections: over voltage protection, over load protection, short circuit protection and over temperature protection
- IP20
- 5-year warranty (please refer to the warranty description)



### Applications


· Grow lighting · indoor office lighting · decorative lighting · commercial lighting · residential lighting

### Descriptions

LF-GAT075-3125-24 is a 75W constant voltage triac dimmable LED driver with 0-100% dimming range. Its rated input voltage ranges from 198 to 253Vac; its output voltage is 24Vdc and its rated output current is 3.125A. It has high efficiency and low THD. It is suitable for indoor constant voltage LED strip light, etc.

### Product Model

LF - GAT 075 - 3125 - 24

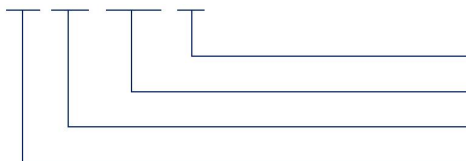

- 24: maximum output voltage: 24V
- 3125: maximum output current: 3125mA
- 075: rated output power: 75W
- GAT: CV triac dimmable LED driver series

### Lifud Technology Co., Ltd.

Add.: 3AF, Block B, Xingzhan Plaza, No.446, Nanhuan Rd., Shajing St., Bao'an Dist., Shenzhen, Guangdong, China

Factory I: Lifud Gardern-style Industrial Park, Tianfu New Dist., Meishan City, Sichuan, China

Factory II: Lifud Intelligent Manufacture Industrial Park, Zhichuang Rd., Banfu Town, Zhongshan, Guangdong, China

Website: [www.lifud.com](http://www.lifud.com)

Telephone: +86(0)755 8373 9299

Email: [sales@lifud.com](mailto:sales@lifud.com)

## ■ Electrical Characteristics

Model		LF-GAT075-3125-24				
Output	Output Current	3125mA max.				
	Output Voltage	DC 24V				
	Output Power	75W max.				
	Flicker Index	IEC-Pst ≤1, CIE SVM ≤0.9, modulation depth ≤0.1% According to flicker-free standard (IEEE Std 1789-2015)				
	Voltage Tolerance	24V±0.5V				
	Temperature Drift	±10%				
Input	Input Voltage	220-240Vac (voltage limit: 198-253Vac)				
	Input Frequency	47-63Hz				
	Input Current	0.6A max.				
	PF	≥0.95@230Vac full load				
	THD	≤25%@230Vac full load				
	Efficiency	≥88%@220Vac@24V full load				
	Inrush Current	≤50A & 400uS@230Vac				
	Loading Quantities of Circuit Breaker	Model	B10	C10	B16	C16
		Quantity (pcs)	8	11	13	17
	Leakage Current	<0.5mA				
Protections	Surge	L-N: 1kV				
	Open Circuit	Open circuit voltage ≤30Vdc				
	Short Circuit	Hiccup mode (auto-recovery)				
	Over Temperature	Auto-recovery				
Environment Descriptions	Operating Temperature	-20°C~+45°C				
	Operating Humidity	20-90%RH (without condensation)				
	Storage Temperature/ Humidity	-30°C - 60°C (6 months in Class I environment); 10-95%RH (without condensation)				
	Atmospheric Pressure	86-106kPa				

## ■ Electrical Characteristics

<b>Safety and EMC</b>	Certifications	TUV-ENEC, CE, CB, RCM, SAA, CCC
	Withstanding Voltage	I/P-O/P: 3.75kVac, <5mA, 60S
	Insulation Resistance	I/P-O/P: >100MΩ@500Vdc
	Safety Standards	ENEC:EN61347-1:2015,EN61347-2-13:2014/A1:2017, EN62384:2016/A1:2009; CE-LVD:EN61347-2-13:2014/A1:2017,EN61347-1:2015, EN62493:2015; SAA:AS61347.2-13:2018; CB:IEC61347-1:2015,IEC61347-2-3:2014, IEC61347-2-13:2014/AMD1:2016; CCC:GB19510.1-2009,GB19510.14-2009
	EMI	CE-EMC/RCM: EN55015, EN61000-3-2, EN61000-3-3 CCC: GB/T17743, GB17625.1, GB17625.2
	EMS	CE-EMC/RCM: EN61000-4-2, 3, 4, 5 (lightning strike 1kV), 6, 11 CCC: GB/T17626.2, 3, 4, 5 (lightning strike 1kV), 6, 11
	ESD	Air 8kV, touch 4kV (Class B)
<b>Other Parameters</b>	IP Rating	IP20
	RoHS	RoHS 2.0 (EU) 2015/863
	Warranty Condition	5 years (Tc ≤85°C)
<b>Testing Equipment</b>	Digital power meter: CHROMA66202, oscilloscope: Tektronix DPO3014, DC electronic load: M9712B, LED board, constant temperature and humidity chamber; Everfine EMS61000-5B: Everfine EMS61000-4A, spectroanalyzer: KH3935, withstanding voltage tester: TH9201B, flicker tester (flicker-free coefficient test) 60N-01, etc.	
<b>Testing Remarks</b>	The above parameters are tested at the ambient temperature of 25°C, humidity of 50%, full load and input voltage of 230Vac without any special remarks.	
<b>Additional Remarks</b>	1. It is recommended that our client install over voltage protection, under voltage protection and surge protection devices in the power supply circuits of light fixtures to ensure electricity safety. 2. The PC shade, casing and plug for assembling the LED driver in the light fixture must meet the fire rating of UL94-V0 or above. 3. The LED driver used in combination with the end device is one of the accessories in the whole light fixture, and its EMC is not only susceptible to the driver itself, but to the LED light fixture and the whole light fixture's wiring. Thus, the manufacturer of LED light fixture should re-confirm the EMC performance of LED driver before the whole light fixture is finished.	


## ■ Recommended Dimmers

Leading edge	Legrand: 58325671325	Legrand: 40-500W	CRESTRON SYSTEM: DIN-IDIM4	LUTRON SYSTEM: LQSE-4A-D	HDL SYSTEM: MD0602.432
Trailing edge	Schneider: ALT400905	CLIPSAL:32E45 0U17IV (white)	DIGINET (Blue)	CLIPSAL:32ELE 17M (Purple)	TRADER(Green)


Note: The above list is tested recommended dimmers. Triac dimmers not recommended need to be tested and confirmed to be normal before use.

## ■ Product Characteristic Curves


PF Curve

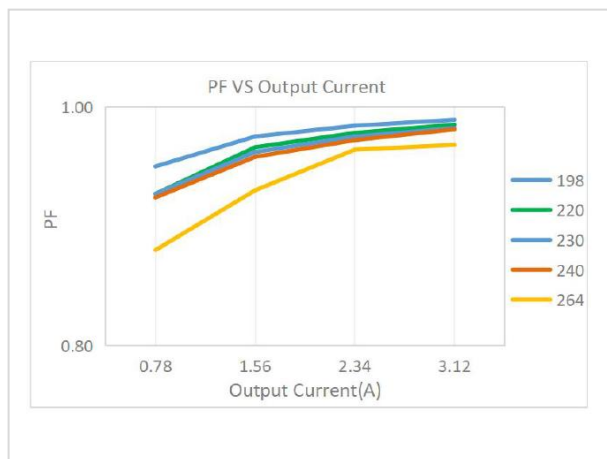

Efficiency Curve

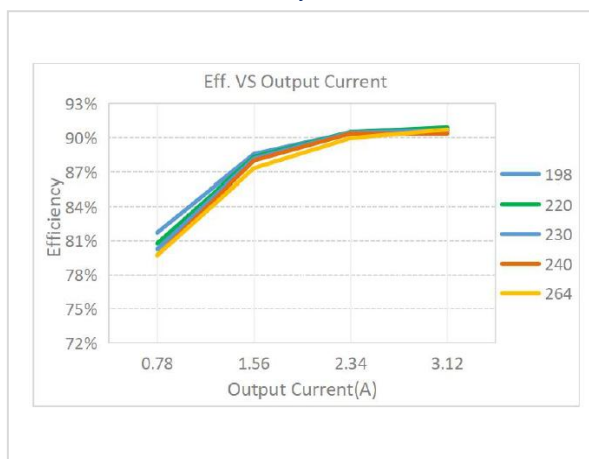

Lifetime Curve


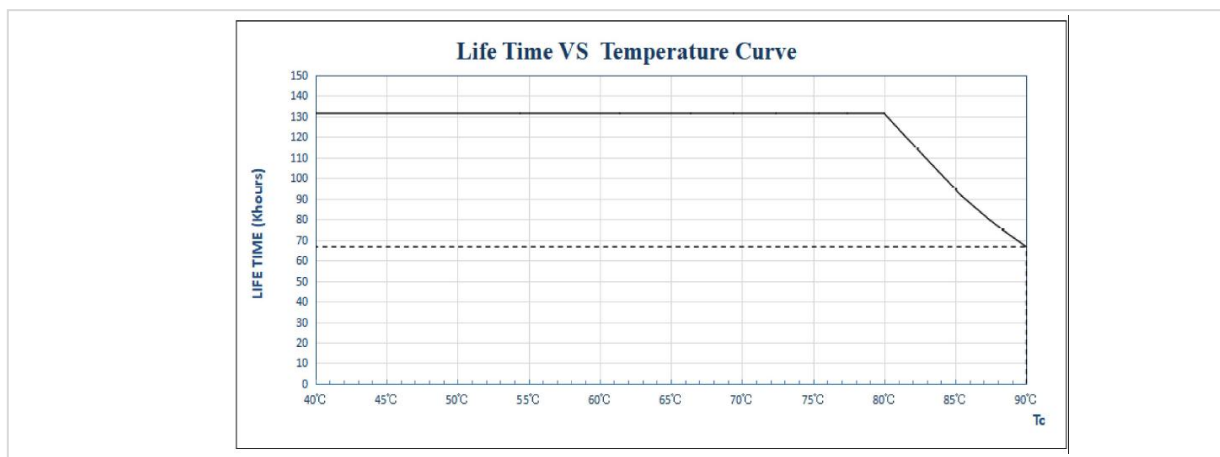


## ■ Dimming Operation Instructions



Product terminals

INPUT		ONPUT	
AC-L	Input terminal of AC live wire	LED+	Positive terminal output of LED driver
AC-N	Input terminal of AC neutral wire	LED-	Negative terminal output of LED driver

## ■ Installation Notes

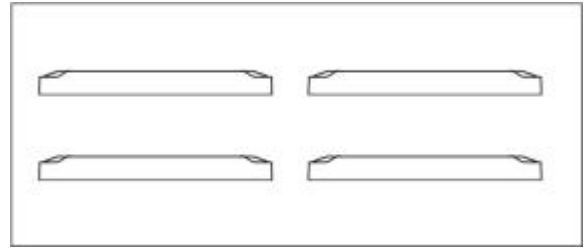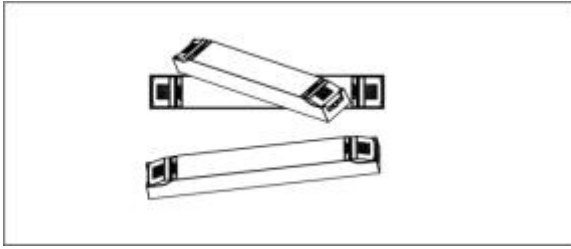


Do NOT stack the LED drivers. Keep a distance of at least 10cm between LED drivers when using them to avoid affecting the heat dissipation and lifetime of the LED drivers.

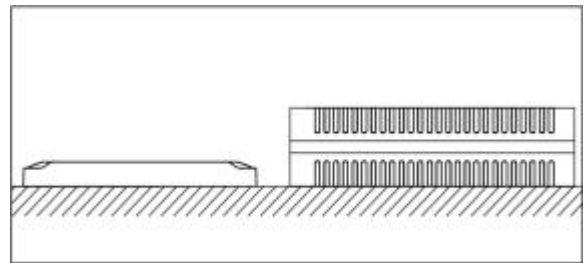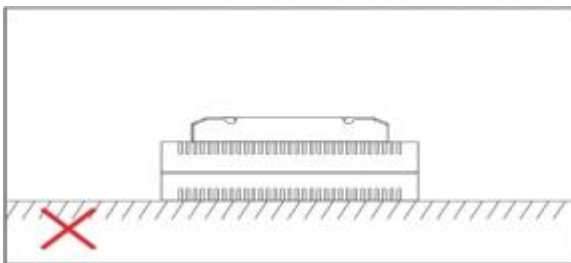


Direct contact between the load and the driver is prohibited when using the LED driver. Keep a distance of at least 10cm between the LED driver and the load to avoid affecting the heat dissipation and lifetime of the LED drivers.

## Wiring Diagram of Triac Dimming Operation

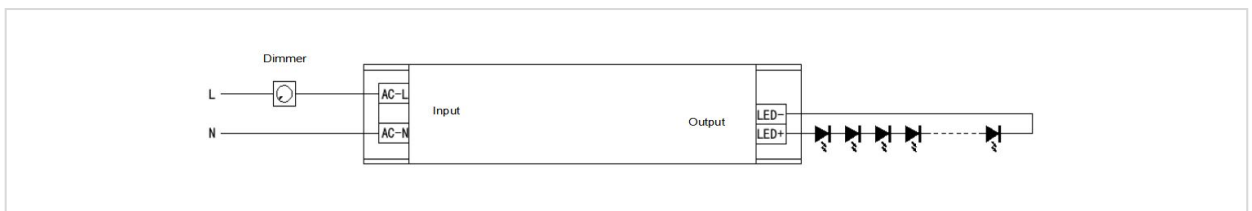

## ■ Structure & Dimensions (unit: mm)

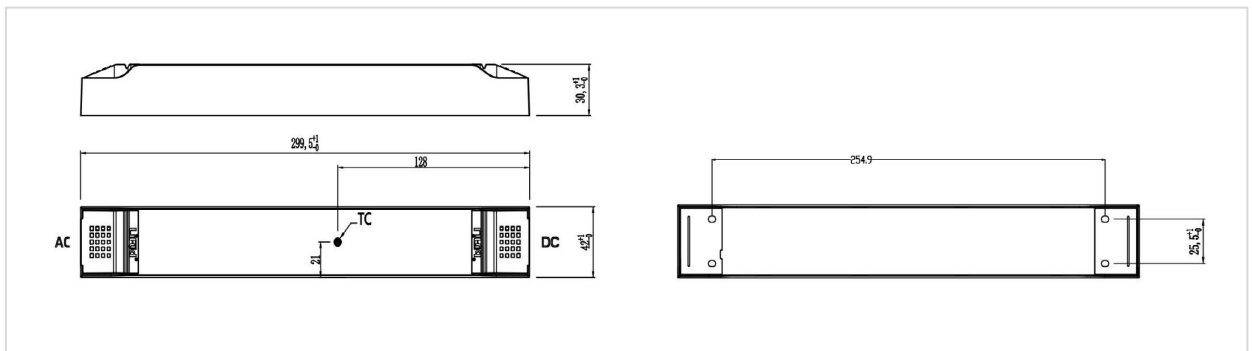

## Lifud Technology Co., Ltd.

Add.: 3AF, Block B, Xingzhan Plaza, No.446, Nanhuan Rd., Shajing St., Bao'an Dist., Shenzhen, Guangdong, China

Factory I: Lifud Gardern-style Industrial Park, Tianfu New Dist., Meishan City, Sichuan, China


Factory II: Lifud Intelligent Manufacture Industrial Park, Zhichuang Rd., Banfu Town, Zhongshan, Guangdong, China

Website: [www.lifud.com](http://www.lifud.com)

Telephone: +86(0)755 8373 9299

Email: [sales@lifud.com](mailto:sales@lifud.com)

- **Label**

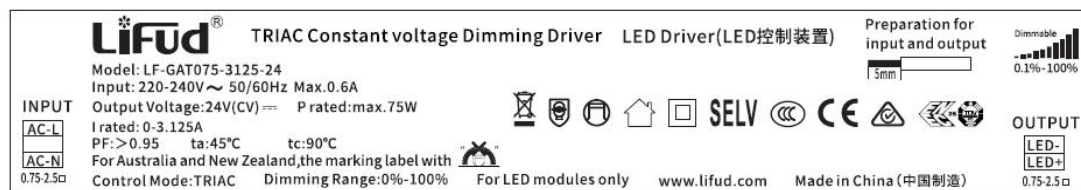

## ■ Packaging Specifications

Model	LF-GAT075-3125-24
Carton Size	400*310*170 mm (L*W*H)
Quantity	8 pcs/layer; 4 layers/ctn; 32 pcs/ctn
Weight	0.32 kg/pc; 10.8 kg/ctn

## ■ Transportation and Storage

## 1. Transportation

- Suitable transportation means: vehicles, boats and aeroplanes.
- In transit, it is necessary to prepare awnings for rain or sun protection. Moreover, please keep civilized loading and unloading to prevent the vibration or impact of LED driver as much as possible.

## 2. Storage

- The storage of LED driver shall conform to the standard of Class I environment. When using LED drivers which have been stored for more than 6 months, please re-test them firstly. Do not use them unless they are tested to be qualified.

## Cautions

- Please use Lifud LED driver according to its parameters in the specification, otherwise the LED driver may malfunction.
- Using any incompatible light fixtures or those that have not been certified may cause fire, explosion or other risks.
- Man-made damage is beyond the scope of Lifud warranty service.

Remark: Lifud Technology Co., Ltd. reserves the right to interpret any contents of this specification.