

**PF5000x10-640SL2835HExx-21W**

**Flexible LED Strip 21W/metre**

**Features**

- Dimmable CV Flexible LED strip
- High efficacy 180lm/W
- 2835HE SMD emitters
- Easy to cut at intervals
- Wide 120° angle of emission
- 3oz copper PCB
- 3M Adhesive backing tape



**Applications**

POS Display equipment, signage, accent & decorative lighting

**Configuration**

Part No. series	PF5000x10-640SL2835HE-xx
LEDs / metre	128
LED Pitch	7.81mm
Reel Size / Qty	5M/640
Strip Width No coating IP20	10.0mm

**Maximum Electrical Characteristics Ta=25°C**

Parameter	24VDC	Unit
Input Voltage	24v Typical	VDC
Current consumption / metre (max)	875mA	mA/m
Current consumption total (max)	4.37A	A/ TOT / reel
Power consumption / metre (max)	21W	W/m
Power consumption total (max)	105W +/- 5%	W/TOT / reel
Operating Temp	-20 to +45°C	°C
Storage Temp	-10 to +55°C	°C


Strip must be mounted on a suitable heatsink for cooling Tp = 65°Cmax

**Optical Characteristics Ta=25°C**

Colour	CCT typ.	Luminous Flux Typ. (lm/m)	CRI	Viewing Angle
Pure White	6000 ~ 6500K	3500 - 3700lm	>90	120°
Daylight White	5000 ~ 5500K	3500 - 3700lm		
Natural White	4000 ~ 4500K	3400 - 3600lm		
Warm White	2600 ~ 2800K	3300 - 3500lm		

Luminous Flux values quoted are typical. Additional power/intensity ratings available. Contact our office for the latest luminous intensity yields

## Dimensions

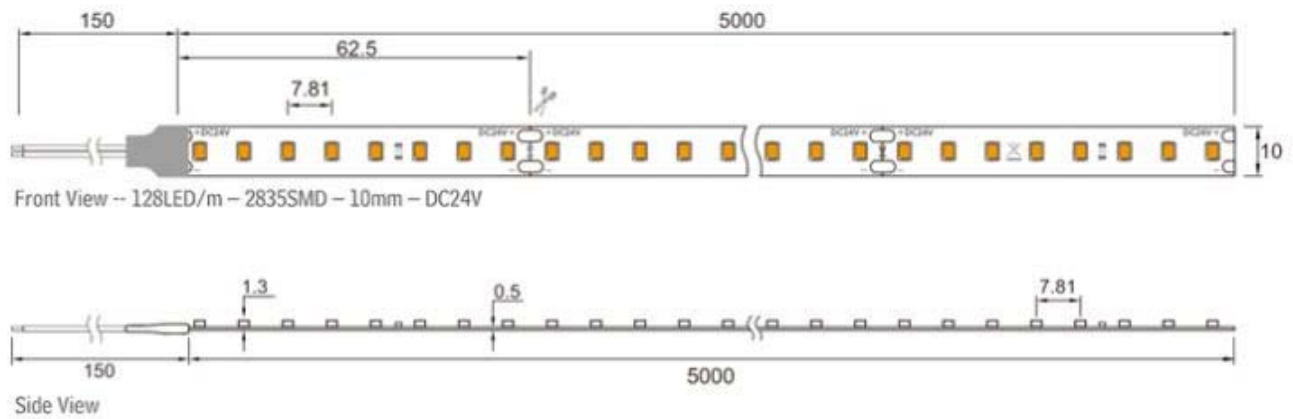

## Notes:

Higher luminous intensity versions are also available configured for increased current drive (power). It is recommended that higher power types >11W/metre are mounted on a suitable heatsink i.e. aluminium to allow cooling and maintain LED life.

The rated life of LED products depends to a large extent on the temperature. If the permissible temperature limits are exceeded, LED lifetimes will be greatly reduced and may lead to catastrophic failure of the LEDs.

## Handling notes:

Ensure that the correct low voltage dc power supply is matched to the flexible strip specification

Avoid repeated bending of the strip as this will damage the circuit and components

Avoid handling of the surface components, in particular the LED emitters, as any pressure may result in damage and latent failures.

When cutting IP65 the ingress protection will be compromised please ensure that the assembly is re-sealed accordingly, in order to maintain the IP rating

## Installation notes:

To achieve a consistent luminous effect, each 5 metre length should be connected to the power source.

To ensure long life we recommend that the strip is kept as cool as possible. Environments where the temperature exceeds 40°C should be avoided

## Drive & Control:

For control solutions please refer to our range of controllers and drive options which include DMX, RF Wireless, WiFi. More information may be found at <http://www.plusopto.co.uk/led-controllers.html>