

PNT-1010-Wx-24V-5W_10W

Neon Flex Top View Vertical bend

Features

- Flexible LED light source
- Top View Vertical bend
- High Performance SMD emitters
- 10x10mm Top view
- Easy to cut at 35.7mm intervals
- Wide 180° angle of emission
- IP67
- 3 Year Warranty



Applications

POS Display equipment, signage, accent & decorative lighting

Maximum Electrical Characteristics Ta=25°C

Parameter	24VDC	Unit
Input Voltage	24v Typical	VDC
CRI / Ra	>90	mA/m
Power consumption / metre (max)	5W and 10W	W/m
Operating Temp	-25 to +45°C	°C

Optical Characteristics Ta=25°C


Part Number	Emitted colour	Wavelength/CCT typ.	Lumens/metre Power 5W/m (max length 5m)	Lumens/metre Power 10W/m (max length 5m)
PNT-1010-W21-24V-x	Extreme Warm White	2000K - 2200K	332	644
PNT-1010-W24-24V-x	Extra Warm White	2300K – 2500K	354	684
PNT-1010-W27-24V-x	Warm White	2600K – 2800K	380	737
PNT-1010-W30-24V-x	Warm White	2900K - 3100K	401	785
PNT-1010-W35-24V-x	Natural/Warm White	3400K – 3700K	371	718
PNT-1010-W40-24V-x	Natural White	3800K – 4300K	429	828
PNT-1010-W50-24V-x	Daylight White White	4800K – 5300K	427	827
PNT-1010-W60-24V-x	Pure White	5900K – 6400K	419	810

Notes:


X denotes suffix -5W for low power -10W for high power

Primary colours R, G, B, Y and Pink also available

Dimensions

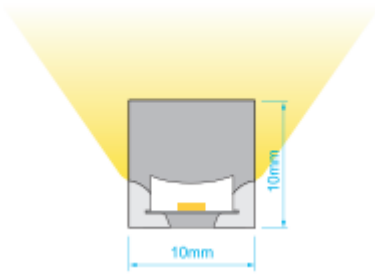


Top view, Vertical bend

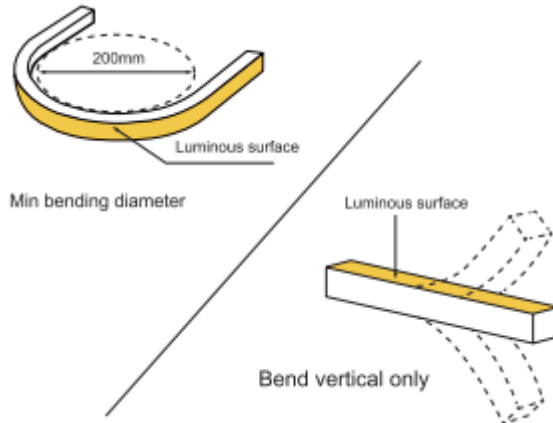

Cutting details



Remark: The bottom of the led strip has transparent window, the black marker is the cutting position

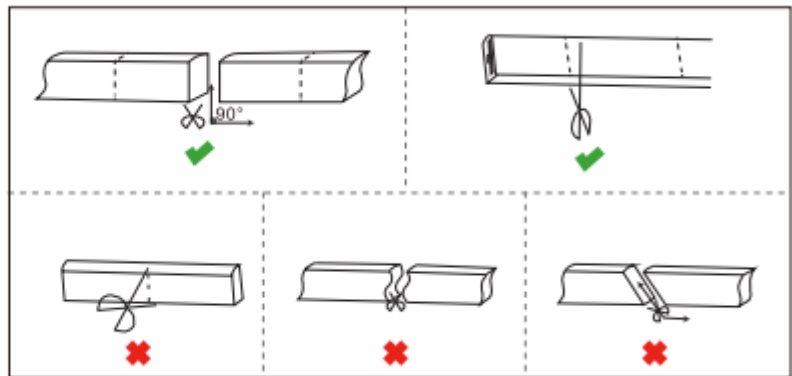


Mounting Accessories

Stainless Steel Mounting clips



Aluminium Profile





T +44 (0) 1942 671122 E sales@plusopto.co.uk W www.plusopto.co.uk

B13 Derwent Court William Way Moss Industrial Estate Leigh Lancashire WN7 3PT

Handling notes:

Ensure that the correct low voltage dc power supply is matched to the flexible strip specification

Avoid repeated bending of the strip as this will damage the circuit and components

Avoid excess pressure on the strip as this may result in damage and latent failures.

When cutting, the ingress protection will be compromised please ensure that the assembly is re-sealed accordingly in order to maintain the IP rating

Installation notes:

To achieve a consistent luminous effect, each 5 metre length should be connected to the power source.

To ensure long life we recommend that the strip is kept as cool as possible and environments where the temperature exceeds 40°C should be avoided

Drive & Control:

For control solutions please refer to our range of controllers and drive options which include DMX, RF Wireless, WiFi. More information may be found at <http://www.plusopto.co.uk/led-controllers.html>

Specifications may be subject to change without notice