
50W 0/1-10V 2 CH LED Driver(constant current)

09.0750W2.04116



Important: Read All Instructions Prior to Installation

Function introduction

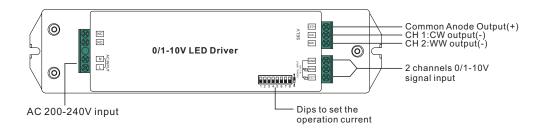

Product Data

| Output | Selectable Current | 250mA | 300mA | 350mA | 400mA | 450mA | 500mA | 600mA | 700mA | |
|-------------|-----------------------------|--|-------|--------|--------|--------|--------|--------|--------|--|
| | DC Voltage Range | 8-48V | 8-48V | 8-48V | 8-48V | 8-48V | 8-48V | 8-48V | 8-48V | |
| | Selectable Current | 800mA | 900mA | 1000mA | 1100mA | 1200mA | 1300mA | 1400mA | 1500mA | |
| | DC Voltage Range | 8-48V | 8-48V | 8-48V | 8-46V | 8-41V | 8-38V | 8-35V | 8-33V | |
| | Rated Power | 50W max. | | | | | | | | |
| Input | Voltage Range | 200-240V AC | | | | | | | | |
| | Frequency | 50/60Hz | | | | | | | | |
| | Power Factor (Typ.) | >0.9 | | | | | | | | |
| | Efficiency (Typ.) | 87% @ 230VAC | | | | | | | | |
| | Input Current (Typ.) | 0.27A @ 230VAC | | | | | | | | |
| | Inrush Current (Typ.) | COLD START Max. 2A at 230VAC | | | | | | | | |
| | Short Circuit | Yes, auto recovery after fault removed | | | | | | | | |
| Protection | Over Voltage | Yes, auto recovery after fault removed | | | | | | | | |
| | Over Temperature | Yes, auto recovery after fault removed | | | | | | | | |
| Environment | Working Temp. | -20℃ ~ +45℃ | | | | | | | | |
| | Max. Case Temp. | 85℃ | | | | | | | | |
| | Working Humidity | 10% ~ 95% RH non-condensing | | | | | | | | |
| | Storage Temp. & Humidity | -40°C ~ +80°C, 10% ~ 95% RH | | | | | | | | |

| Safety&EMC | Safety Standards | ENEC EN61347-1, EN61347-2-13 approved | | | | | | |
|------------|-------------------|---|--|--|--|--|--|--|
| | Withstand Voltage | I/P-O/P: 3.75KVAC | | | | | | |
| | EMC Emission | EN55015, EN61000-3-2, EN61000-3-3 | | | | | | |
| | EMC Immunity | EN61547, EN61000-4-2,3,4,5,6,8,11, surge immunity Line-Line 1KV | | | | | | |
| Others | MTBF | 193.6K hrs min.@ 230VAC at full load and 25°C ambient temperature | | | | | | |
| | Dimension | 210*50*32mm (L*W*H) | | | | | | |

Dips to set the operation current



| | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | |
|-------|---------|---|------------|------------|---|---|---|---|--|
| 250mA | \circ | • | 0 | 0 | | | | | |
| 300mA | 0 | | 0 | 0 | | | | 0 | |
| 350mA | 0 | • | 0 | 0 | | | 0 | | |
| 400mA | \circ | • | 0 | \bigcirc | | | 0 | 0 | |
| 450mA | 0 | • | 0 | 0 | | 0 | | | |
| 500mA | \circ | • | \bigcirc | 0 | | 0 | | 0 | |
| 600mA | 0 | • | 0 | 0 | | 0 | 0 | | |
| 700mA | \circ | | 0 | 0 | | 0 | 0 | 0 | |


| | 1 2 3 4 5 6 7 8 |
|--------|-------------------------------------|
| 800mA | 0 |
| 900mA | $0 \bullet 0 0 0 \bullet \bullet 0$ |
| 1000mA | 0000000 |
| 1100mA | 0000000 |
| 1200mA | 0000000 |
| 1300mA | 0000000 |
| 1400mA | 0000000 |
| 1500mA | 0000000 |

- Dimmable LED driver
- Max. output power 50W total
- 2 channels 250-1500mA constant current output
- Dips to set the operation current
- Class II power supply, full isolated plastic case
- High power factor and efficiency
- To switch and dim single color or CCT color LED lighting
- Built-in 0/1-10V interface, 2 channels 0/1-10V signal input, 1 for brightness control, 1 for CCT control
- Compatible with universal 0/1-10V signal
- IP20 rating
- Suitable for indoor LED lighting applications
- 5 years warranty

Safety & Warnings

- DO NOT install with power applied to device.
- DO NOT set the operation current with power applied
- DO NOT expose the device to moisture.

Wiring Diagram

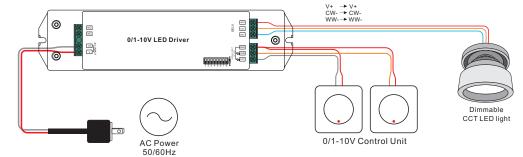

Product Dimension

