

Primax

Synonymous with function and performance, enter the Primax, the new era of high intensity illumination in LED. With its high flux output and high luminous intensity, Primax transcends today LED lightings technology and how we perceive it. The small package outline and high intensity make it an ideal choice for backlighting, signage, exterior automotive lighting and decorative lighting.



Features:

- > Super high brightness surface mount LED
- > 120° viewing angle.
- > Compact package outline (LxW) of 3.7 x 3.5 mm.
- > Ultra low height profile - 0.8mm.
- > Low thermal resistance.
- > Compatible to IR reflow soldering.
- > Environmental friendly; RoHS compliance.
- > Compliance to automotive standard; AEC-Q101.
- > Passed Corrosion Resistant Test. *Appx. 4.1*

Applications:

- > Automotive Interior Lighting
(Dome lamp, map lighting, and trunk lighting)
- > Industrial Illumination.
- > White Goods Lighting.

Optical Characteristics at Tj=25°C

Part Ordering Number	Color	Viewing Angle°	Luminous Flux @ 100mA (Im) <i>Appx. 1.2</i>		
			Min.	Typ.	Max.
PQF-SSG-QR3-1	Warm White	120	30.6	39.8	51.7


Electrical Characteristics at Tj=25°C

Part Number	Vf @ If = 100 mA <i>Appx. 3.1</i>			Vr @ Ir = 10uA
	Min. (V)	Typ. (V)	Max. (V)	Min. (V)
PQF-SSG	2.8	3.1	3.4	5

Absolute Maximum Ratings

	Maximum Value	Unit
DC forward current	180	mA
Peak pulse current (tp ≤ 10ms, Duty cycle = 0.5)	360	mA
Reverse voltage	5	V
ESD threshold (HBM)	2000	V
LED junction temperature	150	°C
Operating temperature	-40 ... +125	°C
Storage temperature	-40 ... +125	°C
Thermal resistance		
- Real Thermal Resistance		
Junction / ambient, Rth JA real (Typ = 90K/W)	120	K/W
Junction / solder point, Rth JS real (Typ = 30K/W)	45	K/W
(Mounting on DOMINANT standard PCB)		

PQF-SSG, Warm White Color Grouping *Appx. 2.1*

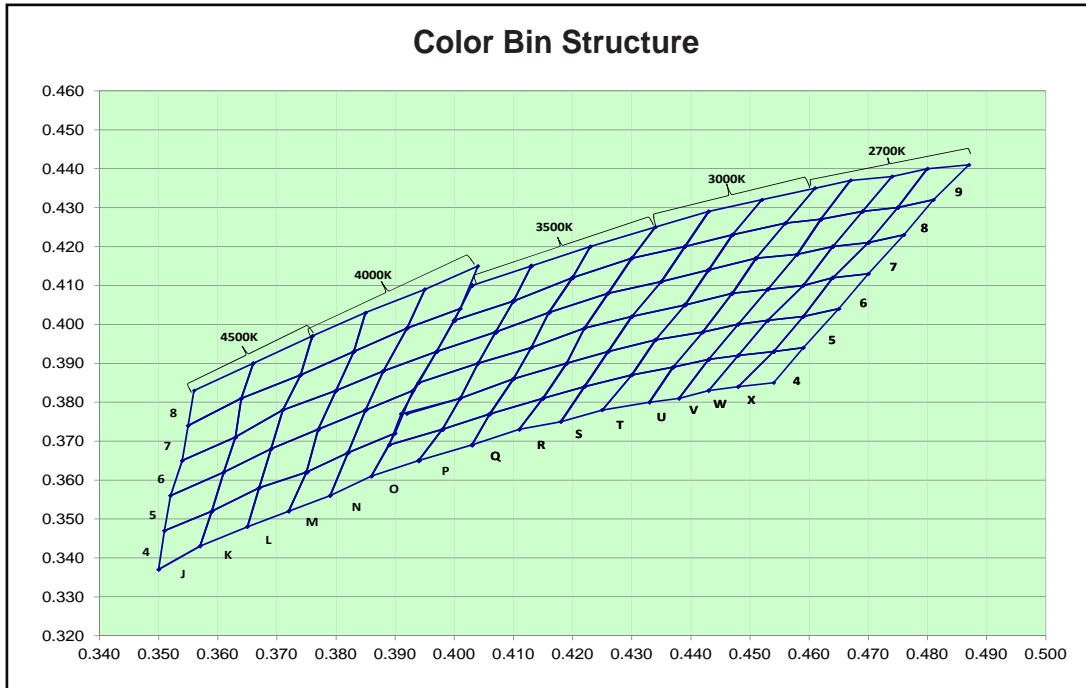

Bin		1	2	3	4
4U	Cx	0.4330	0.4370	0.4430	0.4380
	Cy	0.3800	0.3890	0.3910	0.3810
5U	Cx	0.4370	0.4420	0.4480	0.4430
	Cy	0.3890	0.3980	0.4000	0.3910
6U	Cx	0.4420	0.4470	0.4530	0.4480
	Cy	0.3980	0.4080	0.4090	0.4000
7U	Cx	0.4470	0.4510	0.4580	0.4530
	Cy	0.4080	0.4170	0.4180	0.4090
8U	Cx	0.4510	0.4560	0.4620	0.4580
	Cy	0.4170	0.4260	0.4270	0.4180
9U	Cx	0.4560	0.4610	0.4670	0.4620
	Cy	0.4260	0.4350	0.4370	0.4270
4V	Cx	0.4380	0.4430	0.4480	0.4430
	Cy	0.3810	0.3910	0.3920	0.3830
5V	Cx	0.4430	0.4480	0.4530	0.4480
	Cy	0.3910	0.4000	0.4010	0.3920
6V	Cx	0.4480	0.4530	0.4590	0.4530
	Cy	0.4000	0.4090	0.4100	0.4010
7V	Cx	0.4530	0.4580	0.4640	0.4590
	Cy	0.4090	0.4180	0.4200	0.4100
8V	Cx	0.4580	0.4620	0.4690	0.4640
	Cy	0.4180	0.4270	0.4290	0.4200
9V	Cx	0.4620	0.4670	0.4740	0.4690
	Cy	0.4270	0.4370	0.4380	0.4290

Bin		1	2	3	4
4W	Cx	0.4430	0.4480	0.4540	0.4480
	Cy	0.3830	0.3920	0.3930	0.3840
5W	Cx	0.4480	0.4530	0.4590	0.4540
	Cy	0.3920	0.4010	0.4020	0.3930
6W	Cx	0.4530	0.4590	0.4640	0.4590
	Cy	0.4010	0.4100	0.4120	0.4020
7W	Cx	0.4590	0.4640	0.4700	0.4640
	Cy	0.4100	0.4200	0.4210	0.4120
8W	Cx	0.4640	0.4690	0.4750	0.4700
	Cy	0.4200	0.4290	0.4300	0.4210
9W	Cx	0.4690	0.4740	0.4800	0.4750
	Cy	0.4290	0.4380	0.4400	0.4300
4X	Cx	0.4480	0.4540	0.4590	0.4540
	Cy	0.3840	0.3930	0.3940	0.3850
5X	Cx	0.4540	0.4590	0.4650	0.4590
	Cy	0.3930	0.4020	0.4040	0.3940
6X	Cx	0.4590	0.4640	0.4700	0.4650
	Cy	0.4020	0.4120	0.4130	0.4040
7X	Cx	0.4640	0.4700	0.4760	0.4700
	Cy	0.4120	0.4210	0.4230	0.4130
8X	Cx	0.4700	0.4750	0.4810	0.4760
	Cy	0.4210	0.4300	0.4320	0.4230
9X	Cx	0.4750	0.4800	0.4870	0.4810
	Cy	0.4300	0.4400	0.4410	0.4320
4R	Cx	0.4110	0.4150	0.4220	0.4180
	Cy	0.3730	0.3810	0.3840	0.3750
5R	Cx	0.4150	0.4190	0.4260	0.4220
	Cy	0.3810	0.3900	0.3930	0.3840
6R	Cx	0.4190	0.4220	0.4300	0.4260
	Cy	0.3900	0.3990	0.4020	0.3930
7R	Cx	0.4220	0.4260	0.4350	0.4300
	Cy	0.3990	0.4080	0.4110	0.4020
8R	Cx	0.4260	0.4300	0.4390	0.4350
	Cy	0.4080	0.4170	0.4200	0.4110
9R	Cx	0.4300	0.4340	0.4430	0.4390
	Cy	0.4170	0.4250	0.4290	0.4200
4S	Cx	0.4180	0.4220	0.4300	0.4250
	Cy	0.3750	0.3840	0.3870	0.3780
5S	Cx	0.4220	0.4260	0.4340	0.4300
	Cy	0.3840	0.3930	0.3960	0.3870
6S	Cx	0.4260	0.4300	0.4390	0.4340
	Cy	0.3930	0.4020	0.4050	0.3960
7S	Cx	0.4300	0.4350	0.4430	0.4390
	Cy	0.4020	0.4110	0.4140	0.4050
8S	Cx	0.4350	0.4390	0.4470	0.4430
	Cy	0.4110	0.4200	0.4230	0.4140
9S	Cx	0.4390	0.4430	0.4520	0.4470
	Cy	0.4200	0.4290	0.4320	0.4230
4T	Cx	0.4250	0.4300	0.4370	0.4330
	Cy	0.3780	0.3870	0.3890	0.3800

Bin		1	2	3	4
5T	Cx	0.4300	0.4340	0.4420	0.4370
	Cy	0.3870	0.3960	0.3980	0.3890
6T	Cx	0.4340	0.4390	0.4470	0.4420
	Cy	0.3960	0.4050	0.4080	0.3980
7T	Cx	0.4390	0.4430	0.4510	0.4470
	Cy	0.4050	0.4140	0.4170	0.4080
8T	Cx	0.4430	0.4470	0.4560	0.4510
	Cy	0.4140	0.4230	0.4260	0.4170
9T	Cx	0.4470	0.4520	0.4610	0.4560
	Cy	0.4230	0.4320	0.4350	0.4260
4O	Cx	0.3860	0.3890	0.3980	0.3940
	Cy	0.3610	0.3690	0.3730	0.3650
5O	Cx	0.3890	0.3910	0.4010	0.3980
	Cy	0.3690	0.3770	0.3810	0.3730
6O	Cx	0.3910	0.3940	0.4040	0.4010
	Cy	0.3770	0.3850	0.3900	0.3810
7O	Cx	0.3940	0.3970	0.4070	0.4040
	Cy	0.3850	0.3930	0.3980	0.3900
8O	Cx	0.3970	0.4000	0.4100	0.4070
	Cy	0.3930	0.4010	0.4060	0.3980
9O	Cx	0.4000	0.4030	0.4130	0.4100
	Cy	0.4010	0.4100	0.4150	0.4060
4P	Cx	0.3940	0.3980	0.4060	0.4030
	Cy	0.3650	0.3730	0.3770	0.3690
5P	Cx	0.3980	0.4010	0.4100	0.4060
	Cy	0.3730	0.3810	0.3860	0.3770
6P	Cx	0.4010	0.4040	0.4130	0.4100
	Cy	0.3810	0.3900	0.3940	0.3860
7P	Cx	0.4040	0.4070	0.4160	0.4130
	Cy	0.3900	0.3980	0.4030	0.3940
8P	Cx	0.4070	0.4100	0.4200	0.4160
	Cy	0.3980	0.4060	0.4120	0.4030
9P	Cx	0.4100	0.4130	0.4230	0.4200
	Cy	0.4060	0.4150	0.4200	0.4120
4Q	Cx	0.4030	0.4060	0.4150	0.4110
	Cy	0.3690	0.3770	0.3810	0.3730
5Q	Cx	0.4060	0.4100	0.4190	0.4150
	Cy	0.3770	0.3860	0.3900	0.3810
6Q	Cx	0.4100	0.4130	0.4220	0.4190
	Cy	0.3860	0.3940	0.3990	0.3900
7Q	Cx	0.4130	0.4160	0.4260	0.4220
	Cy	0.3940	0.4030	0.4080	0.3990
8Q	Cx	0.4160	0.4200	0.4300	0.4260
	Cy	0.4030	0.4120	0.4170	0.4080
9Q	Cx	0.4200	0.4230	0.4340	0.4300
	Cy	0.4120	0.4200	0.4250	0.4170
4L	Cx	0.3650	0.3670	0.3750	0.3720
	Cy	0.3480	0.3580	0.3620	0.3520
5L	Cx	0.3670	0.3690	0.3770	0.3750
	Cy	0.3580	0.3680	0.3730	0.3620

Bin		1	2	3	4
6L	Cx	0.3690	0.3710	0.3800	0.3770
	Cy	0.3680	0.3780	0.3830	0.3730
7L	Cx	0.3710	0.3740	0.3830	0.3800
	Cy	0.3780	0.3870	0.3930	0.3830
8L	Cx	0.3740	0.3760	0.3850	0.3830
	Cy	0.3870	0.3970	0.4030	0.3930
4M	Cx	0.3720	0.3750	0.3820	0.3790
	Cy	0.3520	0.3620	0.3670	0.3560
5M	Cx	0.3750	0.3770	0.3850	0.3820
	Cy	0.3620	0.3730	0.3780	0.3670
6M	Cx	0.3770	0.3800	0.3880	0.3850
	Cy	0.3730	0.3830	0.3880	0.3780
7M	Cx	0.3800	0.3830	0.3920	0.3880
	Cy	0.3830	0.3930	0.3990	0.3880
8M	Cx	0.3830	0.3850	0.3950	0.3920
	Cy	0.3930	0.4030	0.4090	0.3990
4N	Cx	0.3790	0.3820	0.3900	0.3860
	Cy	0.3560	0.3670	0.3720	0.3610
5N	Cx	0.3820	0.3850	0.3930	0.3900
	Cy	0.3670	0.3780	0.3830	0.3720
6N	Cx	0.3850	0.3880	0.3970	0.3930
	Cy	0.3780	0.3880	0.3930	0.3830
7N	Cx	0.3880	0.3920	0.4010	0.3970
	Cy	0.3880	0.3990	0.4040	0.3930
8N	Cx	0.3920	0.3950	0.4040	0.4010
	Cy	0.3990	0.4090	0.4150	0.4040
4J	Cx	0.3500	0.3510	0.3590	0.3570
	Cy	0.3370	0.3470	0.3520	0.3430
5J	Cx	0.3510	0.3520	0.3610	0.3590
	Cy	0.3470	0.3560	0.3620	0.3520
6J	Cx	0.3520	0.3540	0.3630	0.3610
	Cy	0.3560	0.3650	0.3710	0.3620
7J	Cx	0.3540	0.3550	0.3640	0.3630
	Cy	0.3650	0.3740	0.3810	0.3710
8J	Cx	0.3550	0.3560	0.3660	0.3640
	Cy	0.3740	0.3830	0.3900	0.3810
4K	Cx	0.3570	0.3590	0.3670	0.3650
	Cy	0.3430	0.3520	0.3580	0.3480
5K	Cx	0.3590	0.3610	0.3690	0.3670
	Cy	0.3520	0.3620	0.3680	0.3580
6K	Cx	0.3610	0.3630	0.3710	0.3690
	Cy	0.3620	0.3710	0.3780	0.3680
7K	Cx	0.3630	0.3640	0.3740	0.3710
	Cy	0.3710	0.3810	0.3870	0.3780
8K	Cx	0.3640	0.3660	0.3760	0.3740
	Cy	0.3810	0.3900	0.3970	0.3870

InGaN wavelength is very sensitive to drive current. Operating at lower current is not recommended and may yield unpredictable performance current pulsing should be used for dimming purposed.

Luminous Intensity Group at T_j=25°C

Brightness Group	Luminous Flux IV (lm) <i>Appx. 1.2</i>
Q2	30.6 ... 34.8
Q3	34.8 ... 39.8
R2	39.8 ... 45.2
R3	45.2 ... 51.7


V_f Binning (Optional)

V _f @ I _f = 100mA	Forward Voltage (V) <i>Appx. 3.1</i>
V1	2.80 ... 3.00
V2	3.00 ... 3.20
V3	3.20 ... 3.40

Please consult sales and marketing for special part number to incorporate V_f binning.


Relative Luminous Flux Vs Forward Current

$\Phi_V/\Phi_V(100\text{mA}) = f(I_F); T_j = 25^\circ\text{C}$

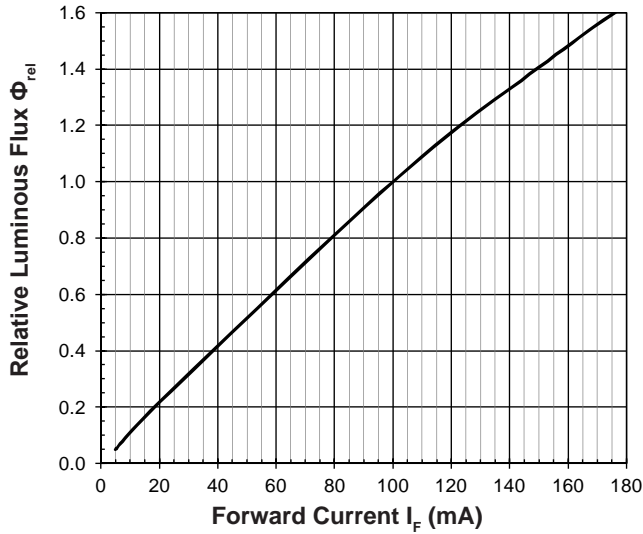


Forward Current Vs Forward Voltage

$I_F = f(V_F); T_j = 25^\circ\text{C}$

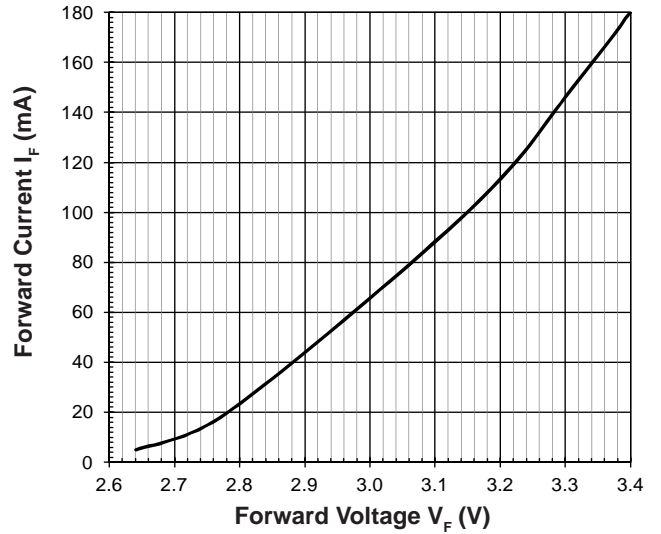


Maximum Current Vs Temperature

$I_F = f(T)$

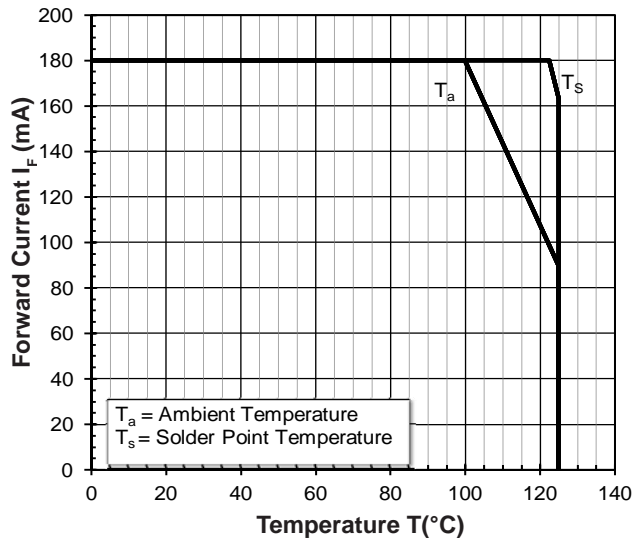


Relative Spectral Emission

$\Phi_{rel} = f(\lambda); T_j = 25^\circ\text{C}; I_F = 100\text{mA}$

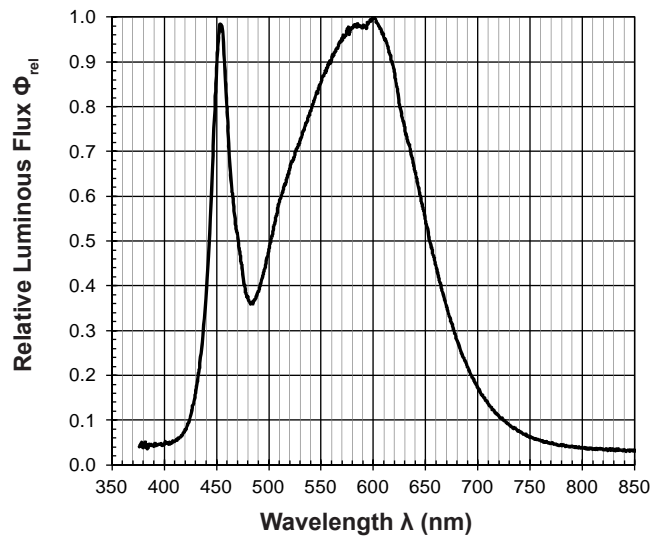

Chromaticity Coordinate Shift Vs Forward Current

$\Delta Cx, \Delta Cy = f(I_F); T_j = 25^\circ\text{C}$

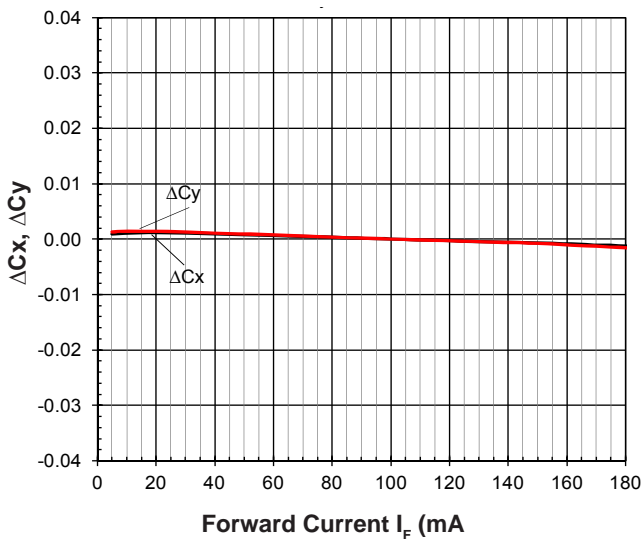


Allowable Forward Current Vs Duty Ratio

$(T_j = 25^\circ\text{C}; t_p \leq 10\text{ms})$




Radiation Pattern

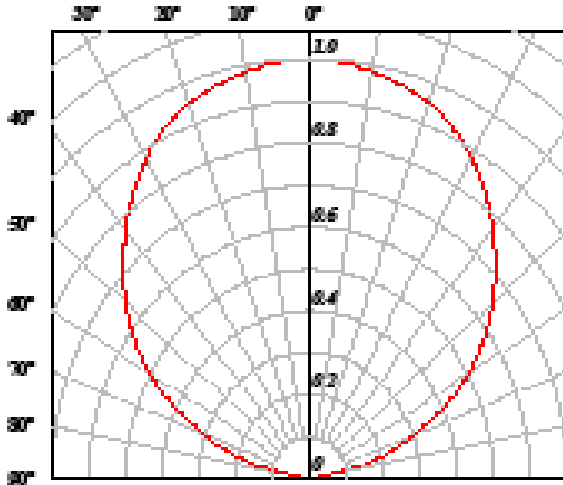


Relative Forward Voltage Vs Junction Temperature

$$\Delta V_F = V_F - V_F(25^\circ\text{C}) = f(T_j); I_F = 100\text{mA}$$

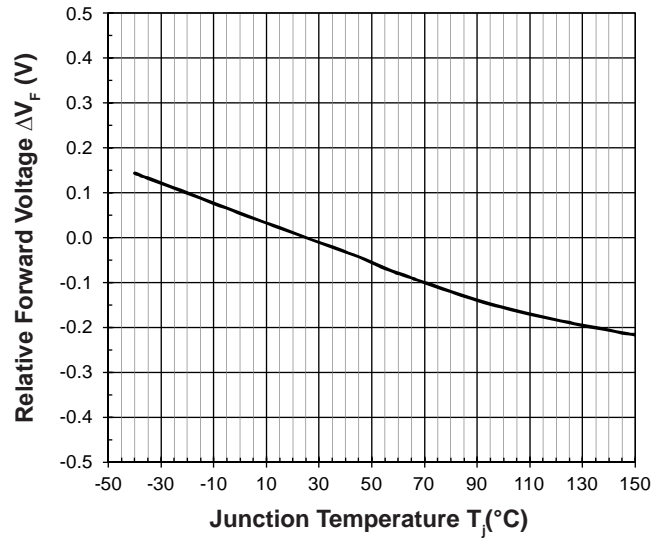


Relative Luminous Flux Vs Junction Temperature

$$\Phi_V/\Phi_V(25^\circ\text{C}) = f(T_j); I_F = 100\text{mA}$$

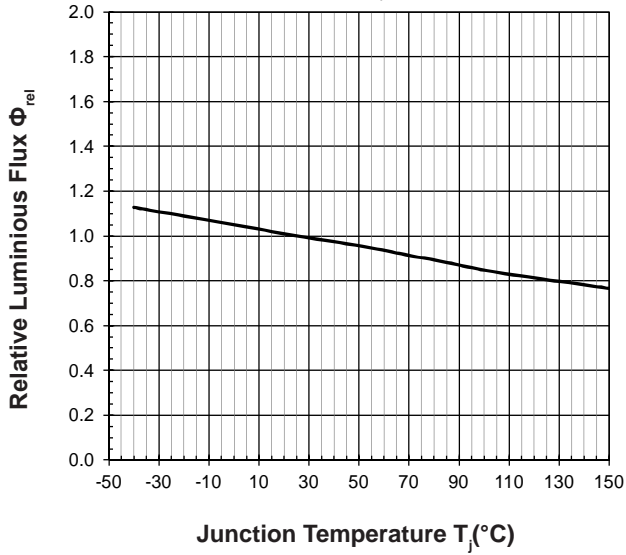


Chromaticity Coordinate Shift Vs Junction Temperature

$$\Delta C_x, \Delta C_y = f(T_j); I_F = 100\text{mA}$$

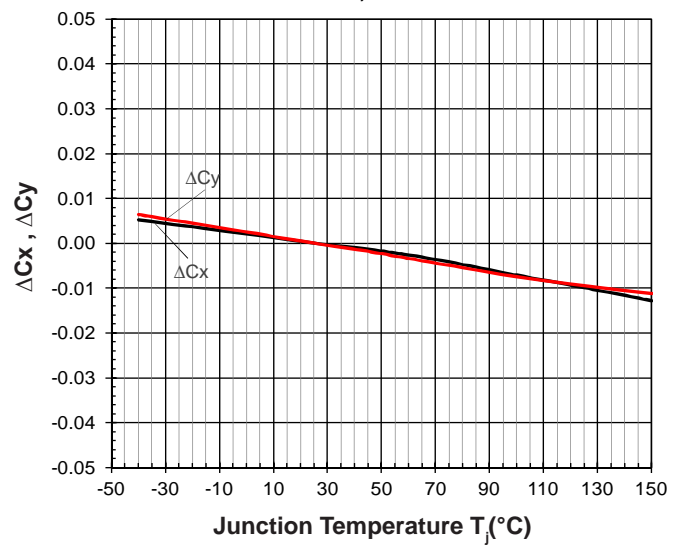

PrimaxPlus 100 InGaN Warm White: PQF-SSG Package Outlines

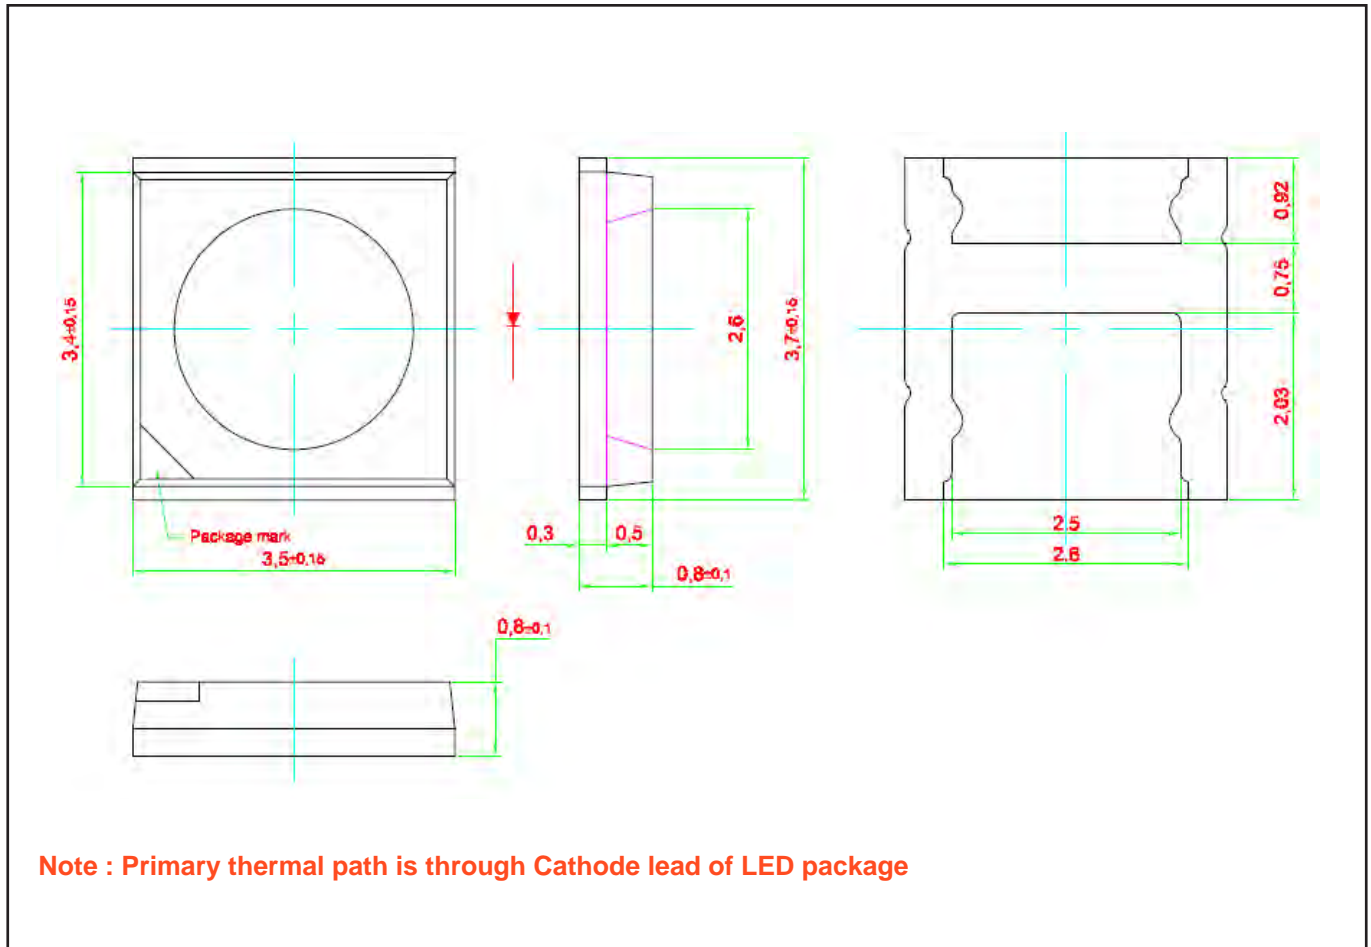


Material

Material	
Lead-frame	Cu Alloy With Ag Plating
Package	High Temperature Resistant Plastic
Encapsulant	Silicone Resin
Soldering Leads	NiPdAu Plating


Note: This product is Pb free

Recommended Solder Pad

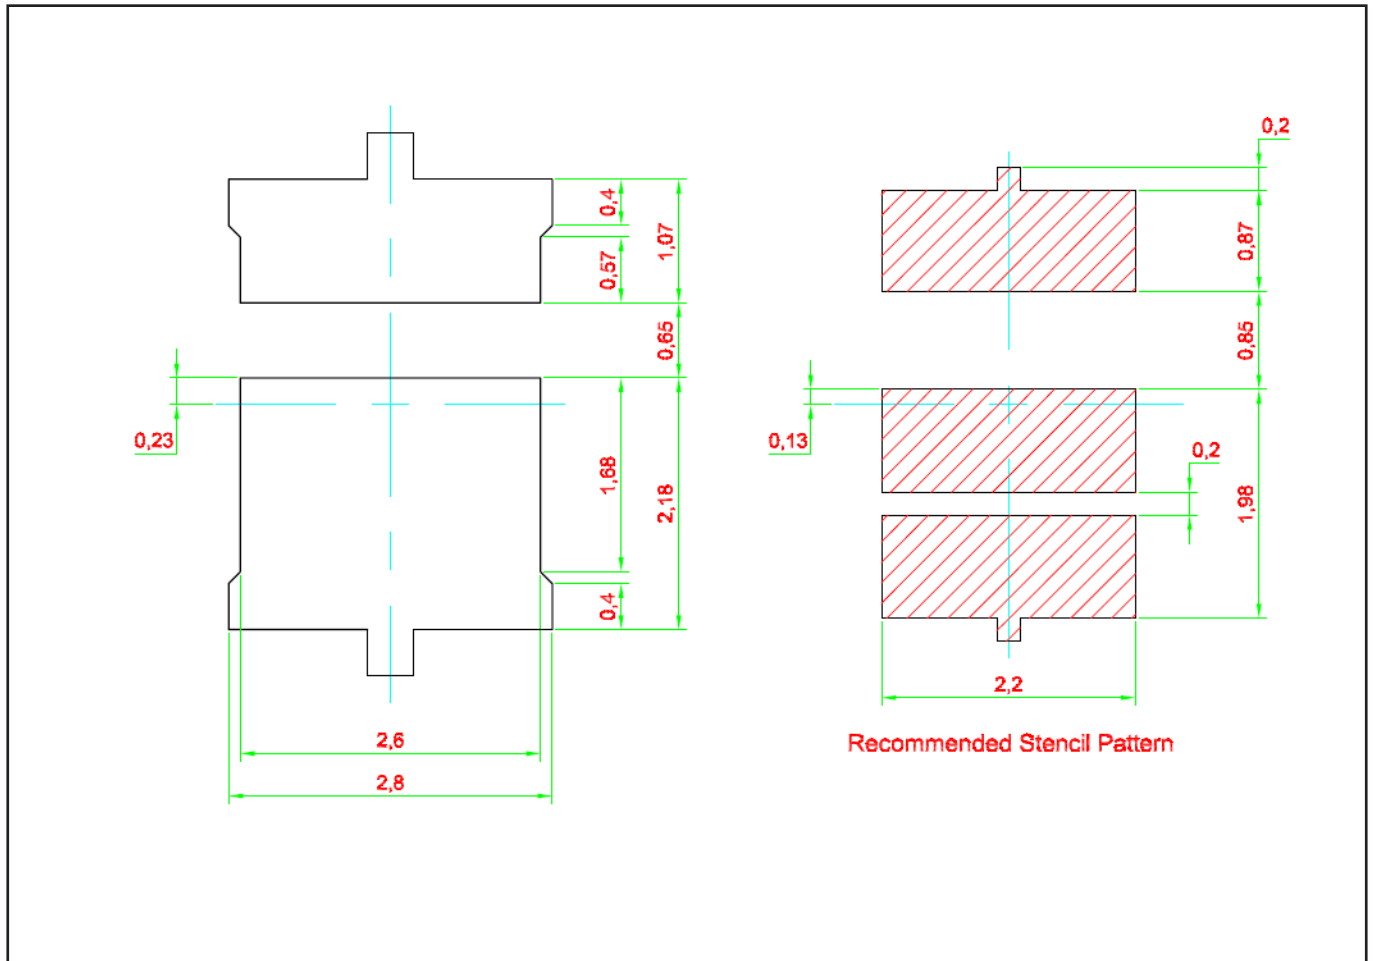


Taping and orientation


- Reels come in quantity of 1000 units.
- Reel diameter is 180 mm.

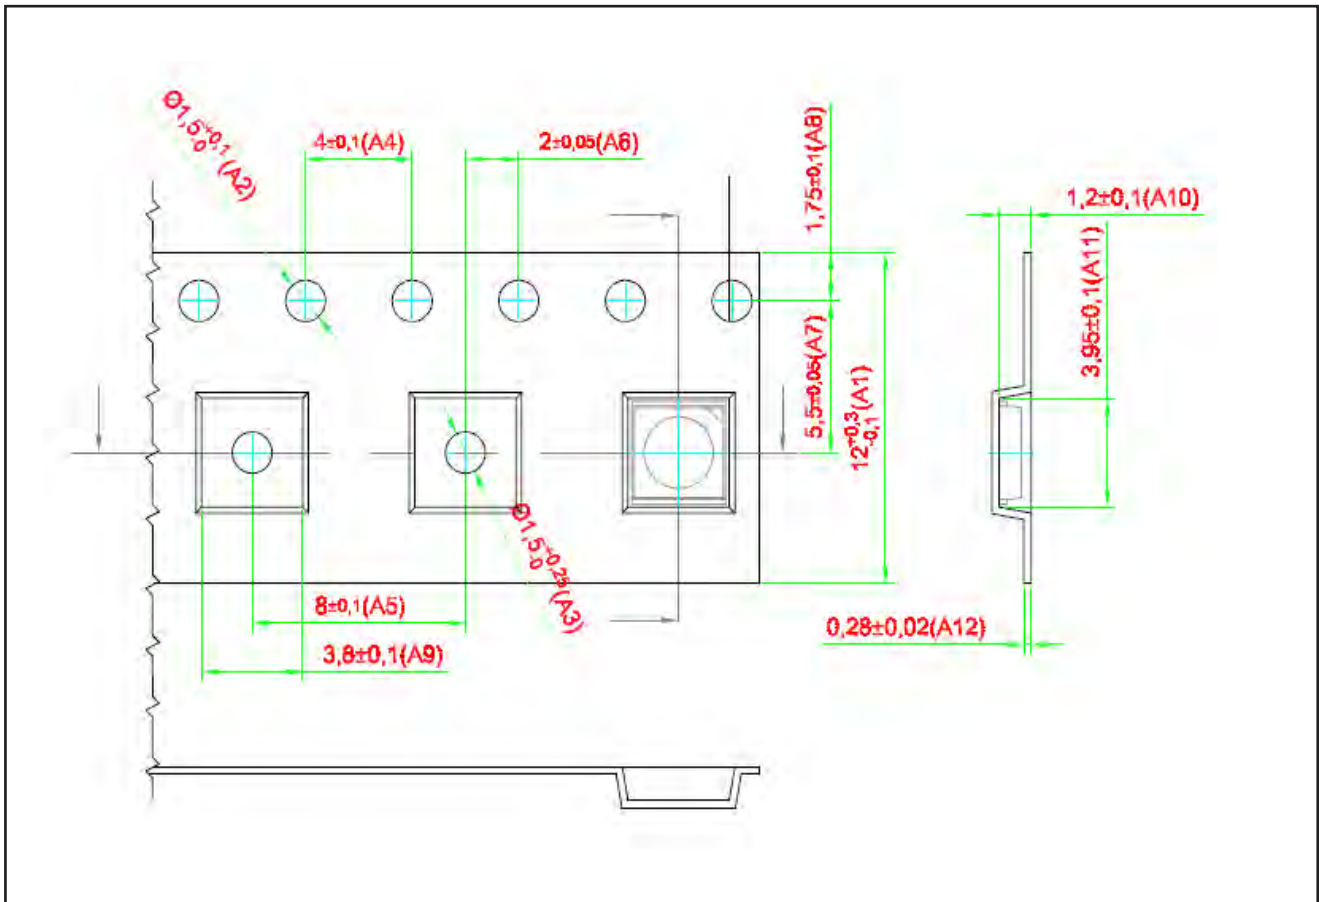


Packaging Specification

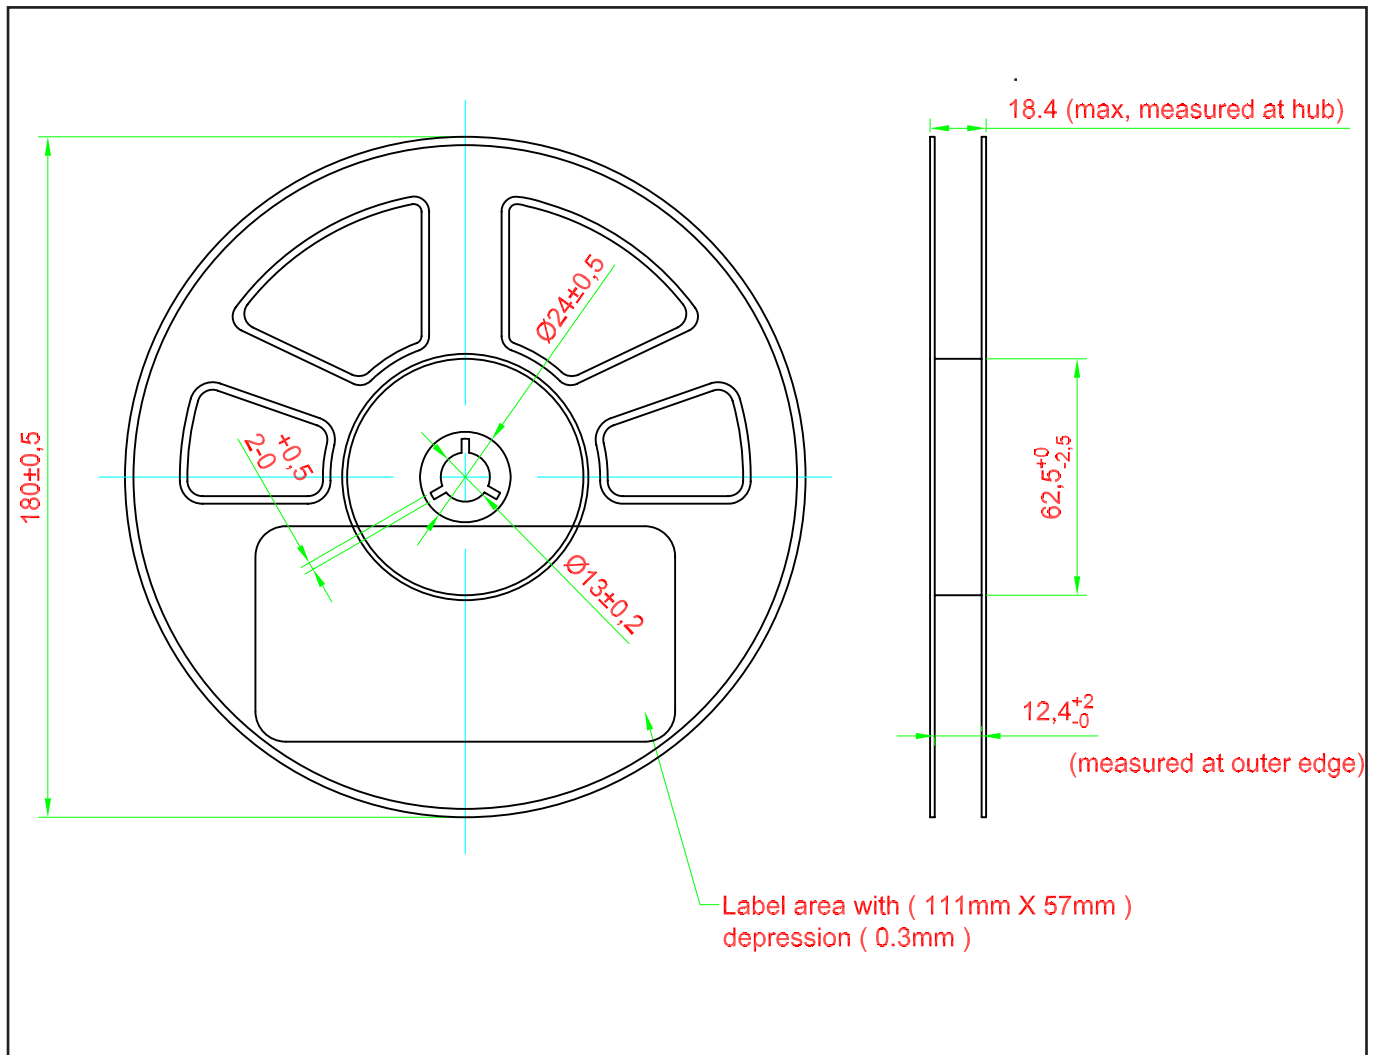

Packaging Specification

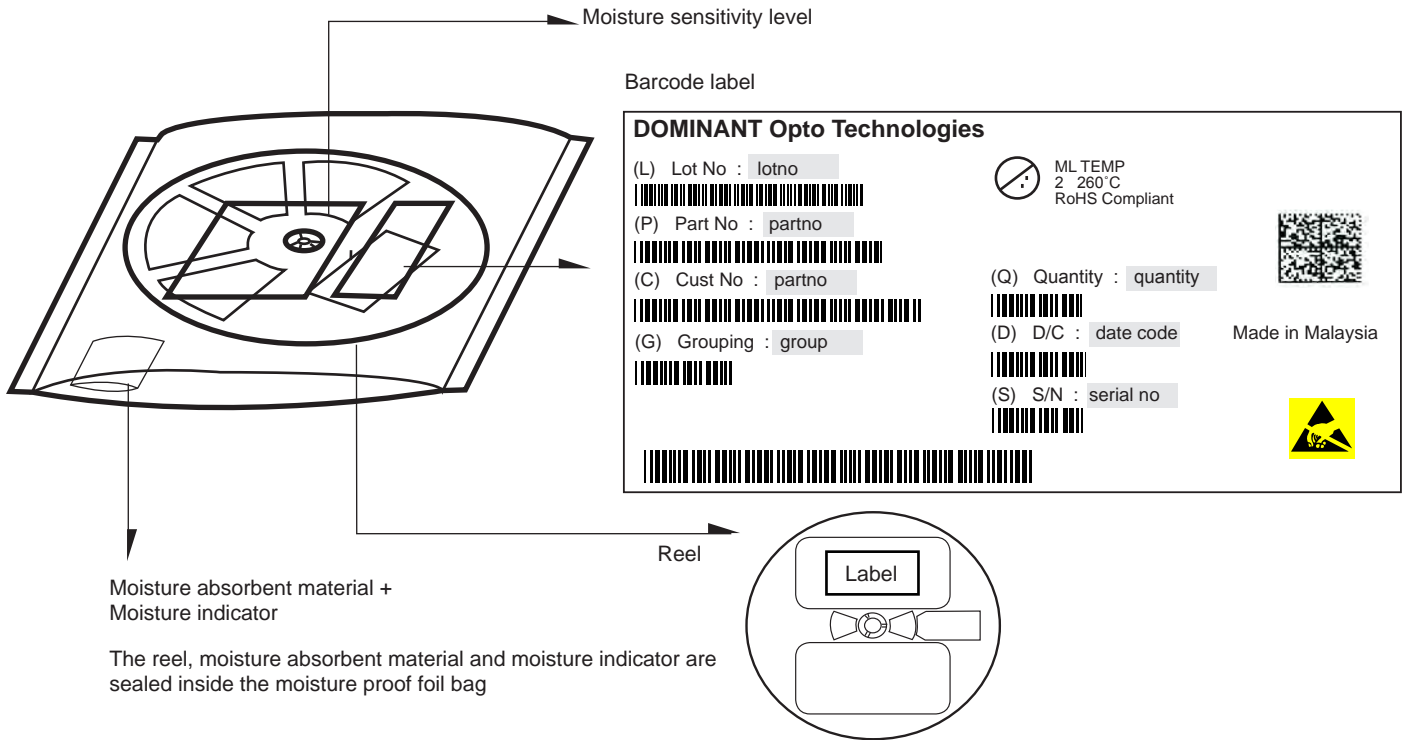


	Average 1pc PrimaxPlus	1 completed bag (1000pcs)
Weight (gram)	0.034	230 ± 10

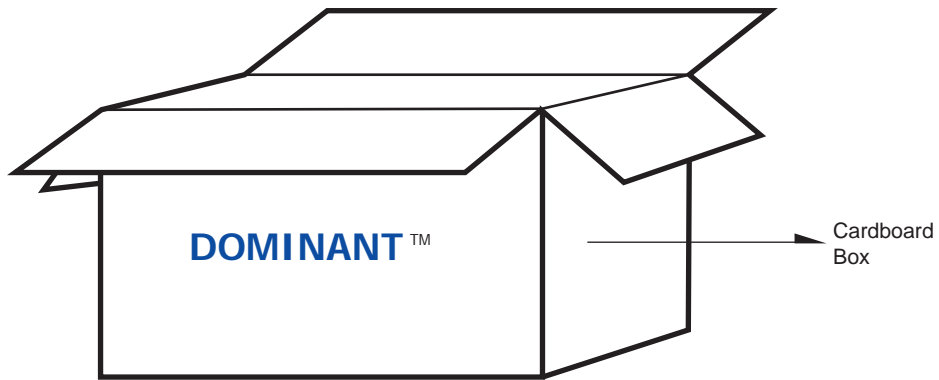

For PrimaxPlus

Cardboard Box Size	Dimensions (mm)	Empty Box Weight (kg)	Reel / Box
Super Small	325 x 225 x 190	0.38	7 reels MAX
Small	325 x 225 x 280	0.54	11 reels MAX
Medium	570 x 440 x 230	1.46	48 reels MAX
Large	570 x 440 x 460	1.92	96 reels MAX

Recommended Pb-free Soldering Profile

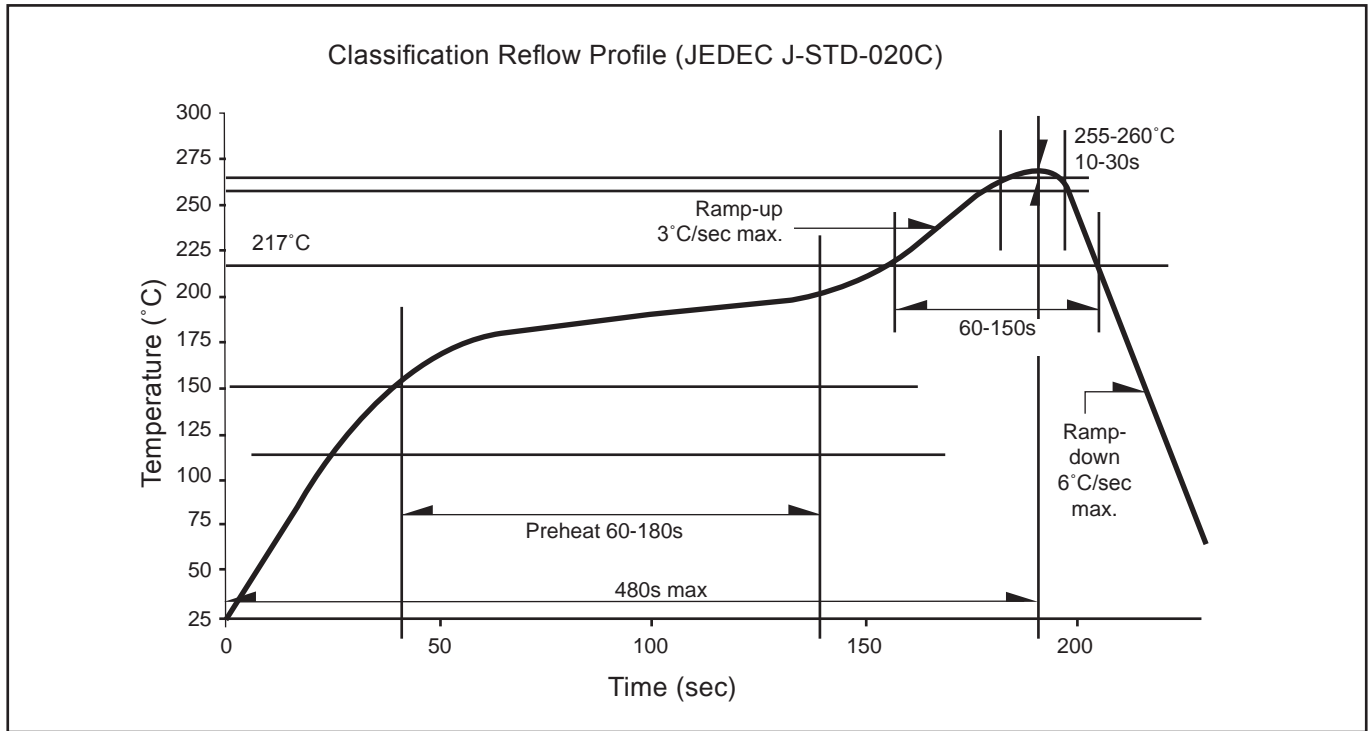

Appendix

1) **Brightness:**

- 1.1 Luminous intensity is measured with an internal reproducibility of $\pm 8 \%$ and an expanded uncertainty of $\pm 11 \%$ (according to GUM with a coverage factor of $k=3$).
- 1.2 Luminous flux is measured with an internal reproducibility of $\pm 8 \%$ and an expanded uncertainty of $\pm 11 \%$ (according to GUM with a coverage factor of $k=3$).

2) **Color:**

- 2.1 Chromaticity coordinate groups are measured with an internal reproducibility of ± 0.005 and an expanded uncertainty of ± 0.01 (accordingly to GUM with a coverage factor of $k=3$).
- 2.2 DOMINANT wavelength is measured with an internal reproducibility of $\pm 0.5\text{nm}$ and an expanded uncertainty of $\pm 1\text{nm}$ (accordingly to GUM with a coverage factor of $k=3$).

3) **Voltage:**

- 3.1 Forward Voltage, V_f is measured with an internal reproducibility of $\pm 0.05\text{V}$ and an expanded uncertainty of $\pm 0.1\text{V}$ (accordingly to GUM with a coverage factor of $k=3$).

4) **Corrosion Robustness:**

- 4.1 Test conditions: $40 \text{ }^\circ\text{C} / 90 \text{ } \%$ rh / $15 \text{ ppm H}_2\text{S} / 336 \text{ h}$.
= Stricter than IEC 60068-2-43 (H_2S) [$25 \text{ }^\circ\text{C} / 75\% \text{ rh} / 10 \text{ ppm H}_2\text{S} / 21 \text{ days}$].

Revision History

Page	Subjects	Date of Modification
-	Initial release	19 Apr 2016
10	Typo error on material	10 May 2016
14	Typo error on weight per unit	22 Jun 2016
1, 2, 8, 9, 16	Add Features Update Peak Pulse Current Update Real Thermal Resistance Update Graph: Maximum Current Vs Temperature Add Graph: Allowable Forward Current Vs Duty Ratio Add Appendix	19 Dec 2016

NOTE

All the information contained in this document is considered to be reliable at the time of publishing. However, DOMINANT Opto Technologies does not assume any liability arising out of the application or use of any product described herein.

DOMINANT Opto Technologies reserves the right to make changes to any products in order to improve reliability, function or design.

DOMINANT Opto Technologies products are not authorized for use as critical components in life support devices or systems without the express written approval from the Managing Director of DOMINANT Opto Technologies.

About Us

DOMINANT Opto Technologies is a dynamic company that is amongst the world's leading automotive LED manufacturers. With an extensive industry experience and relentless pursuit of innovation, DOMINANT's state-of-art manufacturing and development capabilities have become a trusted and reliable brand across the globe. More information about DOMINANT Opto Technologies, a ISO/TS 16949 and ISO 14001 certified company, can be found under <http://www.dominant-semi.com>.

Please contact us for more information:

DOMINANT Opto Technologies Sdn. Bhd
Lot 6, Batu Berendam, FTZ Phase III, 75350 Melaka, Malaysia.
Tel: +606 283 3566 Fax: +606 283 0566
E-mail: sales@dominant-semi.com
